



# Filter box FSBQL

[Download Wentyle](#)  
[Download AlnorCAM](#)  
[Buy via B2B](#)

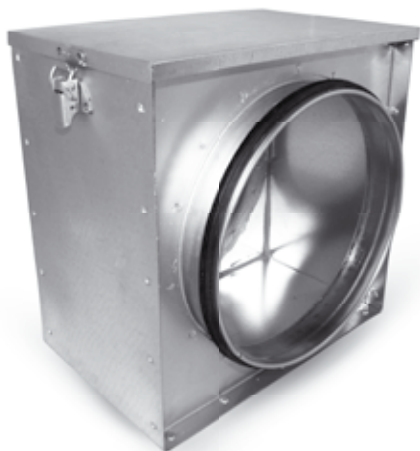

## Dimensions

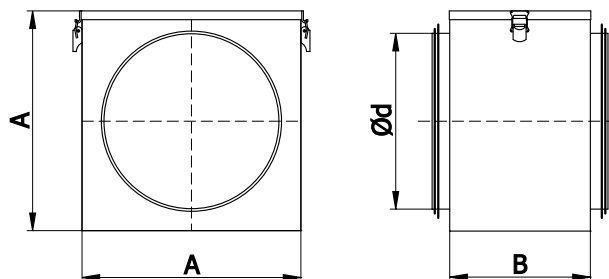

## Description

The FSBQL duct filter is applicable for filtering air in round ventilation ducts of standard diameters 100 - 500 mm. The FSBQL duct filter is housed in a box made of galvanized steel sheet. Its upper part is closed with use of snap fasteners. The housing has mounting connectors with the EPDM rubber seals. A special construction of the FSBQL filter enables easy replacement of a filter element. The FSBQL duct filter can be equipped with a EU3 or EU5 class filter element. It is possible to order a filter element as the FSBQ-I frame filter or the FSBQ-W folded filter, which has a filtering mat protected with a galvanized steel wire mesh.

Example identification

Product code: FSBQL - 160

type \_\_\_\_\_  
 diameter \_\_\_\_\_

type	Ød [mm]	AxA [mm]	B [mm]
FSBQL-100	100	160	160
FSBQL-125	125	180	160
FSBQL-150	150	210	160
FSBQL-160	160	210	160
FSBQL-200	200	250	160
FSBQL-250	250	300	160
FSBQL-315	315	360	160
FSBQL-355	355	400	160
FSBQL-400	400	450	160
FSBQL-450	450	500	160
FSBQL-500	500	550	160