


Filter element FSBQ-I

[Download Wentyle](#)
[Download AlnorCAM](#)
[Buy via B2B](#)



Dimensions

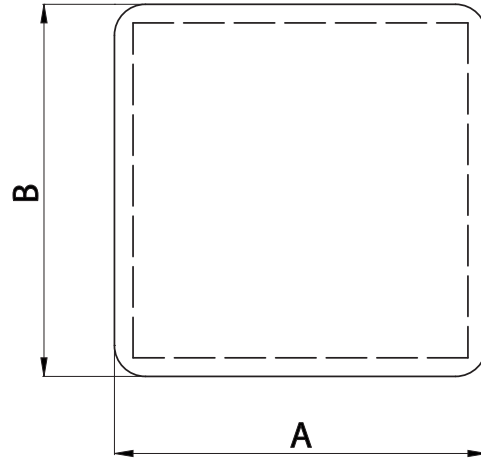

Description


The FSBQ-I filter element is mounted in the FSBQL duct filter. Its construction is very simple - filtering mat is trimmed on a frame made of steel wire. The FSBQ-I filter element is available in two filtering classes EU3 and EU5. .

Example identification

Product code:

FSBQ-I - 3 - 400

type
type of filter element
diameter



Technical Data

FSBQ-I3 - EU3 filtering class filter element (for 5400m³/h/m²)

Initial restriction: 40Pa
Final restriction: 200-250Pa

FSBQ-I5 - EU5 filtering class filter element (for 900m³/h/m²)

Initial restriction: 45Pa
Final restriction: 450Pa

code	A [mm]	B [mm]	filtering class
FSBQ-I3-100	204	160	EU3
FSBQ-I5-100	204	160	EU5
FSBQ-I3-125	220	180	EU3
FSBQ-I5-125	220	180	EU5
FSBQ-I3-150	244	210	EU3
FSBQ-I5-150	244	210	EU5
FSBQ-I3-160	244	210	EU3
FSBQ-I5-160	244	210	EU5
FSBQ-I3-200	278	250	EU3
FSBQ-I5-200	278	250	EU5
FSBQ-I3-250	324	300	EU3
FSBQ-I5-250	324	300	EU5
FSBQ-I3-315	380	360	EU3
FSBQ-I5-315	380	360	EU5
FSBQ-I3-350	418	400	EU3
FSBQ-I5-350	418	400	EU5
FSBQ-I3-400	464	450	EU3
FSBQ-I5-400	464	450	EU5
FSBQ-I3-450	513	500	EU3
FSBQ-I5-450	513	500	EU5
FSBQ-I3-500	563	550	EU3
FSBQ-I5-500	563	550	EU5