




## Dimensions

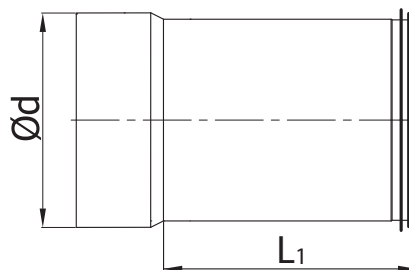

## Description

The SMSFL with EPDM rubber can be used as flexible connection or as duct length compensator. SMSFL can also be used to connect a exchanged segments of ventilation system.

### Example identification

Product code: **SMSFL - aaa - bbb**

type \_\_\_\_\_  
 Ød \_\_\_\_\_  
 L \_\_\_\_\_

$\varnothing d$ nom [mm]	L nom [mm]	L <sub>1</sub> [mm]	weight [kg]
80	150	127	0,19
80	300	288	0,34
80	500	552	0,60
100	150	127	0,24
100	300	288	0,42
100	500	552	0,75
125	150	127	0,30
125	300	288	0,52
125	500	552	0,93
140	150	127	0,33
140	300	288	0,59
140	500	552	1,05
150	150	127	0,35
150	300	288	0,63
150	500	552	1,12
160	150	127	0,38
160	300	288	0,67
160	500	552	1,20
180	150	127	0,42
180	300	288	0,76
180	500	552	1,34
200	150	127	0,47
200	300	288	0,85
200	500	552	1,50
224	150	127	0,53
224	300	288	0,95
224	500	552	1,67
250	150	192	0,72
250	300	302	1,10
250	500	537	1,80

## Dimensions

$\varnothing d$ nom [mm]	L nom [mm]	L <sub>1</sub> [mm]	weight [kg]
280	150	192	0,80
280	300	302	1,22
280	500	537	2,00
300	150	192	0,86
300	300	302	1,30
300	500	537	2,16
315	150	182	0,90
315	300	297	1,33
315	500	537	2,27
355	150	182	1,10
355	300	297	1,60
355	500	537	2,65
400	300	242	1,52
400	500	500	2,90
450	300	242	1,82
450	500	503	3,27
500	300	242	2,05
500	500	503	3,64
630	300	300	1,40
630	500	500	4,35