


Access Doors

IPFQ-RD

[Download Wentyle](#)
[Download AlnorCAM](#)
[Buy via B2B](#)



Dimensions

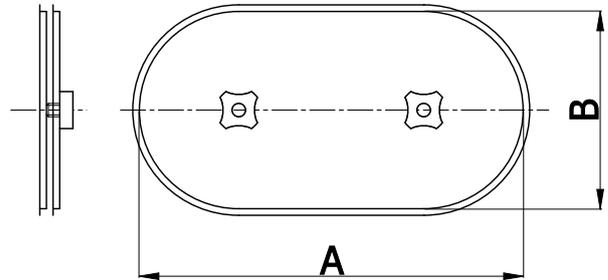

Description

The IPFQ-RD revision door is equipped with a polyethylene gasket. It is designed for mounting on round ducts. Construction of the IPFQ-RD revision door and its gasket ensure its perfect adherence to a surface of a duct on which it is mounted. This ensures high tightness. A pattern enabling cutting out a hole is delivered together with the door.

The following types of IPFQ-RD revision doors are also available:

- IPFQ-RD-K - revision door made of acid resistant sheet
- IPFQ-RD-A - revision door made of aluminium sheet
- IPFQ-RD-I - revision door designed for insulated duct (a thickness of insulation must be stated in the order- 20 - 55 mm are available)
- IPFQ-RD-HT - revision door with a ceramic gasket, resistant up to +400°C.
- IPFQ-LX - special fastening by means of snap fasteners

Example identification

Product code: IPFQ-RD - aaa

type _____
 AxB _____

type	A [mm]	B [mm]
IPFQ-RD-180-80	180	80
IPFQ-RD-200-100	200	100
IPFQ-RD-300-150	300	150
IPFQ-RD-300-200	300	200
IPFQ-RD-400-200	400	200
IPFQ-RD-400-300	400	300
IPFQ-RD-500-300	500	300
IPFQ-RD-500-400	500	400
IPFQ-RD-600-400	600	400
IPFQ-RD-600-500	600	500
IPFQ-RD-700-500	700	500

* A and B - dimensions of the hole to be cut in the duct